
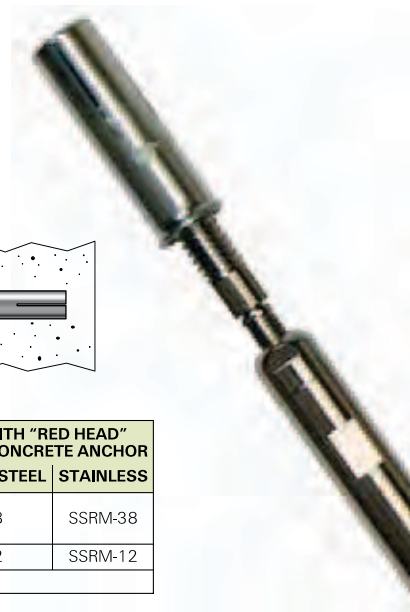
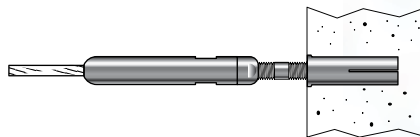


Adjust-A-Body® with Concrete Anchor Bolt Tensioner

Here is an easy, practical way to attach your tensioner to a concrete wall.

The end screws into a commonly available concrete anchor (not included).
Order the concrete anchor separately from your local building supply outlet.

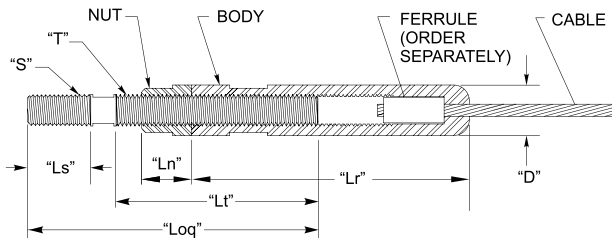

TYPE 316 STAINLESS STEEL

CABLE DIA.	PART NO.	*USE WITH FERRULE NO.	"S"	"T"	"Ls"	"Lt"	"Loq"	"Ln"	"Lr"	"D"	USE WITH "RED HEAD" BRAND CONCRETE ANCHOR	
											CARBON STEEL	STAINLESS
1/8"	A-JAB6	F-4	3/8-16	5/16-24 L.H.	.500"	2.313"	3.188"	.375"	2.75"	.500"	RL-38	SSRM-38
3/16"	A-JAB6	F-6										
1/4"	A-JAB8	F-8	1/2-13	7/16-20 L.H.	1.125"	2.500"	3.938"	.500"	3.00"	.625"	RL-12	SSRM-12


*Order Ferrule Separately.

ISO 9001: 2008 Certified / U.S.A. Manufacturer

1-800-851-2961 ■ 775-885-1443 ■ Fax 775-885-2734

52 Heppner Drive ■ Carson City, NV 89706

E-mail: info@ultra-tec.com Website: www.ultra-tec.com



Ultra-tec®
CABLE RAILING SYSTEMS