
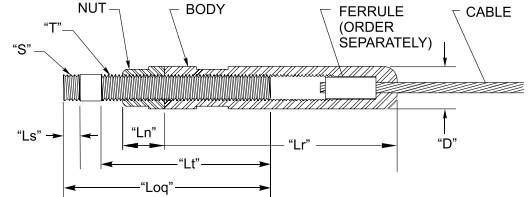


## Adjust-A-Body® with Threaded Bolt Tensioner

Used on straight runs, this tensioner screws into a drilled and tapped hole in your metal post. **Here is a real money-saver, because there is no need for special tees with holes, welded tabs, or any other mounting device.** Recommended for level runs using a minimum schedule 80 pipe or square or rectangular steel tubing with a minimum .250" wall.

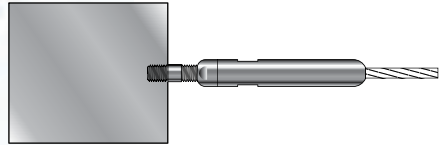

TYPE 316 STAINLESS STEEL

CABLE DIA.	PART NO.	*USE WITH FERRULE NO.	"S"	"T"	"Ls"	"Lt"	"Loq"	"Ln"	"Lr"	"D"
1/8"	A-JTB6	F-4	5/16-24	5/16-24 LH.	.375"	2.00"	2.625"	.375"	2.75"	.500"
3/16"		F-6								
1/4"	A-JTB8	F-8	5/16-24	7/16-20 LH.	.375"	2.50"	3.125"	.500"	3.00"	.625"
5/16"	A-JTB12	F-10	1/2-20	1/2-20 LH.	.62"	3.00"	4.00"	.62"	4.50"	.744"
3/8"		F-12								

\*Order Ferrule Separately.

ISO 9001: 2008 Certified / U.S.A. Manufacturer

1-800-851-2961 ■ 775-885-1443 ■ Fax 775-885-2734

52 Heppner Drive ■ Carson City, NV 89706

E-mail: info@ultra-tec.com Website: www.ultra-tec.com

